



















#### Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
  3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty


## Applications

- · LED street lighting
- LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HLG-150H series is a 150W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-150H operates from  $90 \sim 305 \text{VAC}$  and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for  $-40\,^{\circ}\text{C} \sim +90\,^{\circ}\text{C}$  case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-150H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# ■ Model Encoding

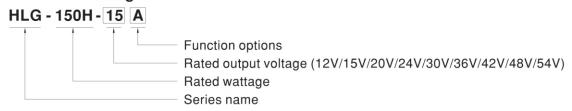

Туре	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request




## **SPECIFICATION**

	HLG-150H-12	HLG-150H-15	HLG-150H-20	HLG-150H-24	HLG-150H-30	HLG-150H-36	HLG-150H-42	HLG-150H-48	HLG-150H-54		
DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V		
CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V		
									2.8A		
									151.2W		
RIPPLE & NOISE (max.) Note.2						200mVp-p	200mVp-p	200mVp-p	200mVp-p		
VOLTAGE ADJ. RANGE					Τ΄						
	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V		
CURRENT AR L RANGE	Adjustable fo	r A/AB-Type o	nly (via built-ii	n potentiomete	er)						
CURRENT ADJ. RANGE	7.5 ~ 12.5A	6 ~ 10A	4.5 ~ 7.5A	3.8 ~ 6.3A	3 ~ 5A	2.5 ~ 4.2A	2.16 ~ 3.6A	1.92 ~ 3.2A	1.68 ~ 2.8A		
VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
									±0.5%		
					±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
SETUP, RISE TIME Note.6											
HOLD UP TIME (Typ.)	16ms / 115VAC, 230VAC										
	90 ~ 305VAC 127 ~ 431VDC										
VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" section)										
EDECLIENCY DANGE											
PREQUENCTRANGE											
POWER FACTOR (Typ.)	· · · · · · · · · · · · · · · · · · ·										
( ) (	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)										
TOTAL HARMONIC DISTORTION	THD<20% (@ load≥60% / 115VAC,230VAC; @ load≥75% / 277VAC)										
- STAL HARMONIO DISTORTION	(Please refer	to "TOTAL HA	ARMONIC DIS	STORTION (TH	ID)" section)						
EFFICIENCY (Typ.)	91.5%	92%	93%	93%	93.5%	93.5%	94%	94%	94%		
( ) ( )					230VAC: Por N	FMA 410					
	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC										
CIRCUIT BREAKER											
LEAKAGE CURRENT	<0.75mA/27	7VAC									
OVER QUERENT	95 ~ 108%										
OVER CURRENT											
SHOPT CIPCILIT											
SHOKT CIRCUIT							47 - 52\/	E4 C2\/	E0 - 651/		
OVER VOLTAGE						41~460	47 ~ 53V	54 ~ 63V	59 ~ 65V		
672K 762I/K62	Shut down o/p voltage with auto-recovery or re-power on to recovery										
OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down										
WORKING TEMP.	Tcase= -40 ~	+90°C (Pleas	e refer to "OU	TPUT LOAD v	s TEMPERATI	JRE" section)					
MAX CASETEMP											
TEMP. COEFFICIENT	±0.03%/°C (	0~60°C)									
VIBRATION	10 ~ 500Hz, 5	G 12min./1cyc	cle, period for	72min. each al	ong X, Y, Z axe	s					
SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No. 250.0-08; BS EN/EN 61347-1, BS EN/EN 61347-2-13, AS/NZS 61347-1 (except for AB-type), AS/NZS 61347-2-13 (except for AB-type) independent; GB19510.1, GB19510.14; IP65 or IP67; J61347-1, J61347-2-13 (except for B										
	AB and D-type), BIS IS15885( for 12B,24B,36A,54A only), EAC TP TC 004; KC61347-1, KC61347-2-13(except for D-type) approved										
WITHSTAND VOLTAGE	21.7.										
ISOLATION RESISTANCE	,	,				20 =1::=::::	0.00.00	(0)	1)		
EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class C (@ load ≧ 60%) ; BS EN/EN61000-3-3,GB17743 and GB17625.1, EAC TP TC 020, KSC 9815(except for D-type)										
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020, KSC 9547(except for D-type)										
MTBF	2176.1K hrs min. Telcordia SR-332(Bellcore); 166.4K hrs min. MIL-HDBK-217F (25°C)										
DIMENSION	228*68*38.8n	nm									
PACKING	1.15Kg; 12pcs	s/14.8Kg/0.8C	UFT								
Ripple & noise are measure     Tolerance: includes set up     Please refer to "DRIVING M     De-rating may be needed ur     Length of set up time is mea     The driver is considered as complete installation, the fin	d at 20MHz of tolerance, line in tolerance, as component in all equipment in latest ErP regulations of 3.5° and tolerance in tolerance in tolerance in tolerance, and tolerance in the tolerance in	bandwidth by regulation and LED MODULE voltages. Plea cold start. Turn hat will be open anufacturers ulation for light by of >62,000 in MEAN WELL C/1000m with	using a 12" to load regulation: se refer to "ST ing ON/OFF to erated in comb must re-qualify ting fixtures, the	wisted pair-wire on.  FATIC CHARA the driver may bination with fin y EMC Directivities LED driver of the things of	e terminated w  CTERISTIC" s lead to increas al equipment. re on the comp can only be us use, particularly anwell.com.	sections for de se of the set u Since EMC polete installation sed behind a s	Tuf parallel cap tails. p time. erformance will n again. witch without p TMP, per DLC perating atitude	be affected be be affected by the affected by the affected by the affect	C or less.		
	CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE  CURRENT ADJ. RANGE  VOLTAGE TOLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.)  VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR (Typ.)  TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT (Typ.) INRUSH CURRENT (Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT speciall 2. Ripple & noise are measure 3. Tolerance: includes set up 4. Please refer to "DRIVING M 5. De-rating may be needed uf 6. Length of set up time is mea 7. The driver in scansidered as completed in requirements of the 8. To of please refer to the warrant 9. This series meets the typica 10. Please refer to the warrant 9. This series meets the typica 10. Please refer to the warrant 11. The please refer to the warrant 12. The please refer to the warrant 13. Tolerance includes set up 14. Please refer to the warrant 15. The please refer to the warrant 16. The please refer to the warrant 17. The please refer to the warrant 18. Tolerance includes set up 19. Please refer to the warrant 19. The please refer to the warrant	DC VOLTAGE  CONSTANT CURRENT REGION Note.4  RATED CURRENT  RATED POWER  RIPPLE & NOISE (max.) Note.2  VOLTAGE ADJ. RANGE  CURRENT ADJ. RANGE  Adjustable for 7.5 ~ 12.5A  Adjustable for 7.5 ~ 12.5A  LINE REGULATION  LOAD REGULATION  SETUP, RISE TIME  Note.5  Note.5  FREQUENCY RANGE  POWER FACTOR (Typ.)  COLTAGE RANGE  POWER FACTOR (Typ.)  TOTAL HARMONIC DISTORTION  EFFICIENCY (Typ.)  AC CURRENT (Typ.)  MAX. No. of PSUs on 16A CIRCUIT BREAKER  LEAKAGE CURRENT  COVER CURRENT  OVER CURRENT  OVER CURRENT  OVER CURRENT  SHORT CIRCUIT  OVER VOLTAGE  WORKING TEMP.  MAX. CASE TEMP.  WORKING HUMIDITY  SAFETY STANDARDS  SAFETY STANDARDS  LOAD **COLD STAST**  WORKING HUMIDITY  SAFETY STANDARDS  LOAD **COLD STAST**  LEMC EMISSION  BE ENCENDED  LOAD **COLD STAST**  LOAD *	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE   12V	DC VOLTAGE   12V   15V   20V   24V   30V   38V   38	DC VOLTAGE   177   175   175   176   200   247   305   307   387   42		




### ■ BLOCK DIAGRAM

Fosc: 100KHz

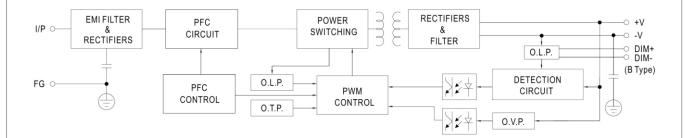

### **■** DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

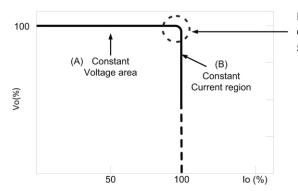


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




### ■ DIMMING OPERATION




#### ※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

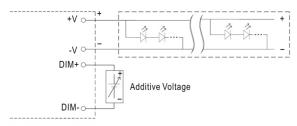


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

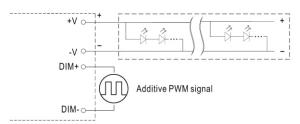



"DO NOT connect "DIM- to -V"


Applying additive resistance:

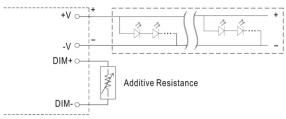

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

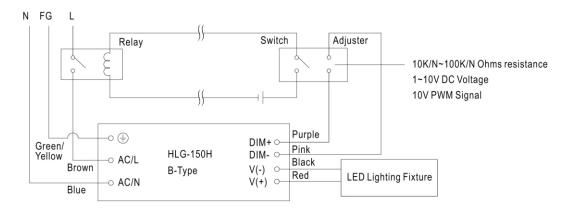


Using a switch and relay can turn ON/OFF the lighting fixture.



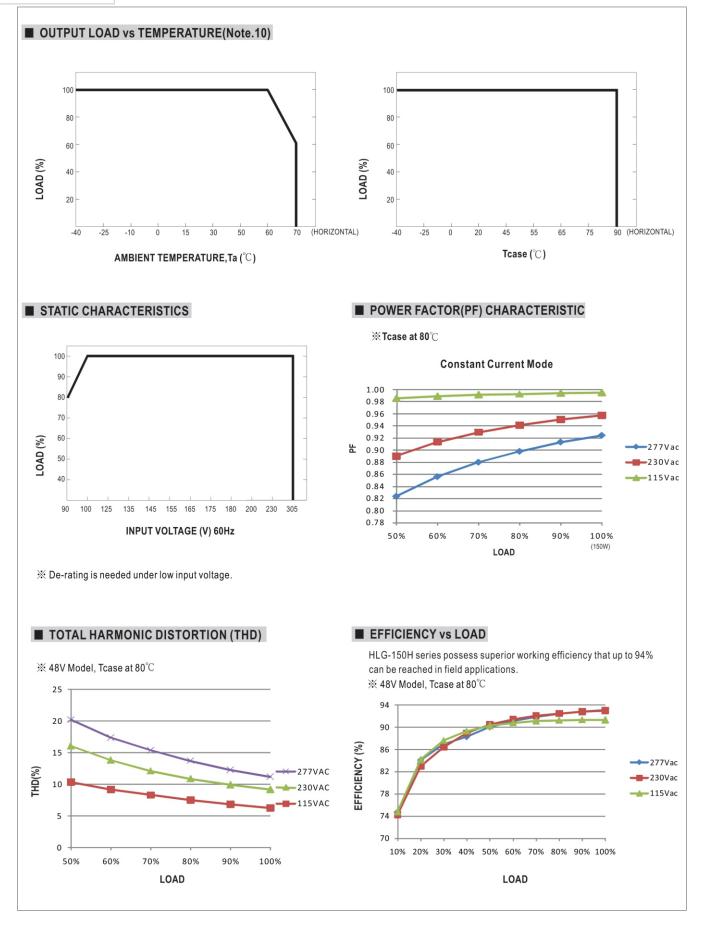





# ■ LIFE TIME

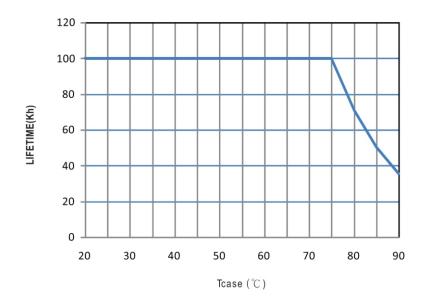



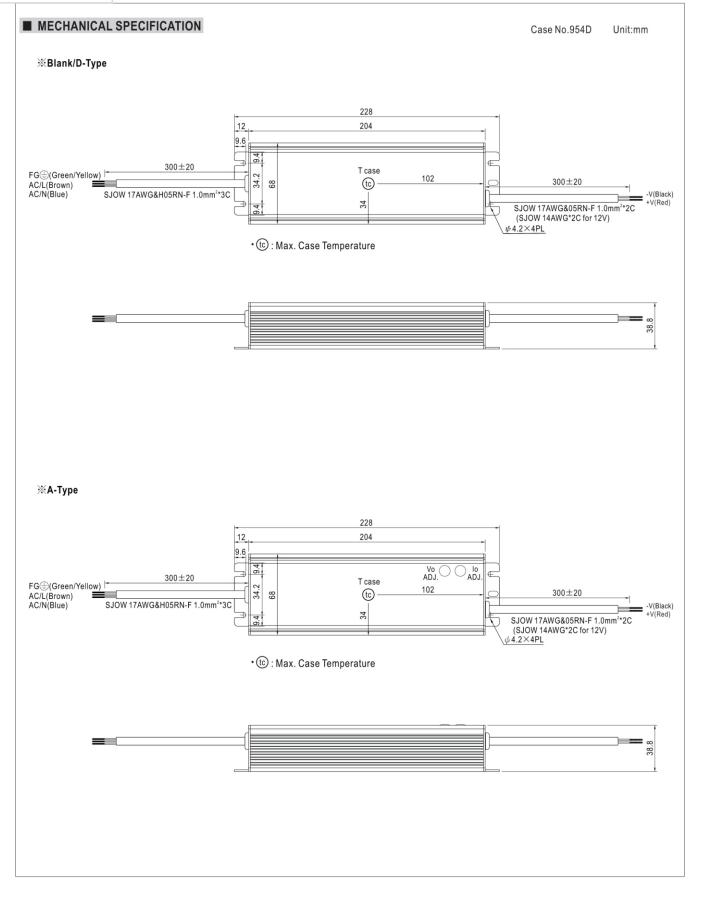



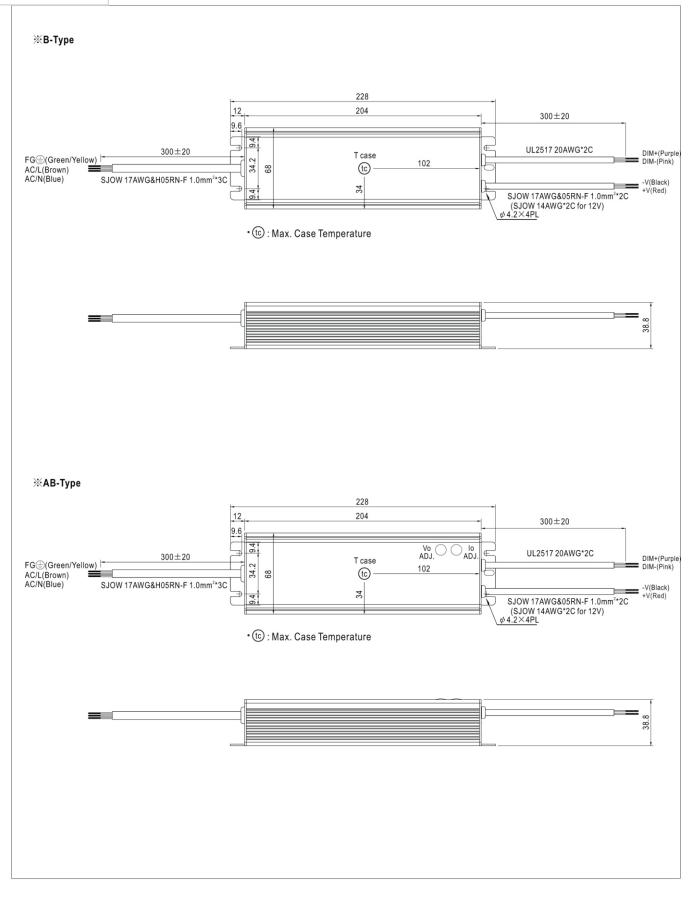





### ■ WATERPROOF CONNECTION

#### **X** Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-150H to operate in dry/wet/damp or outdoor environment.

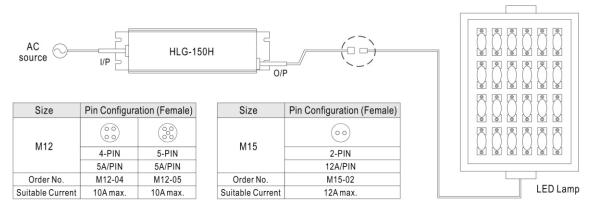

#### **X** Cable Joiner

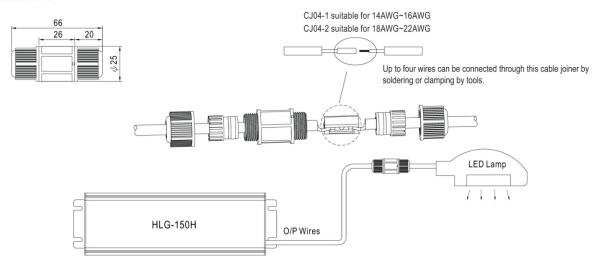

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

